


Enhanced performance cable for transmission of high speed data, digital and analogue voice and video (RGB) signals on LANs. Supports Gigabit Ethernet (1000 baseT) standard. Operates at bandwidth of 250 MHz. This cable well exceeds the requirements of TIA/EIA-568-C.2.

**Applications:**

- Suitable for Burial Cables
- Near Power Lines
- High EMI Interference surroundings

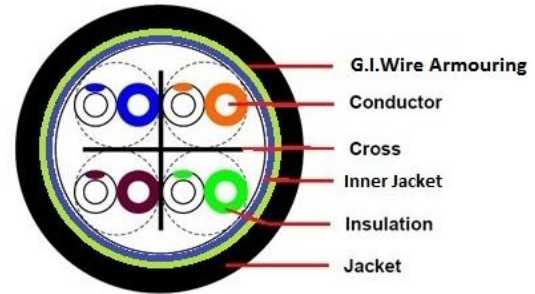

**Construction:**

Conductor	Solid Bare Electrolytic Grade Copper
Nominal Conductor Diameter	(23 AWG) 0.550 ± 0.015
Insulation	Polyethylene
Colour Code:	
Pair #1	Orange-White with Orange
Pair #2	Brown-White with Brown
Pair #3	Blue-White with Blue
Pair #4	Green-White with Green
Rip Cord	Yes
Inner Jacket	PVC
Thickness of Inner Jacket	0.65 to 0.70 mm
Armouring	G.I. Wire
Size of Wire	0.90 ± 0.030mm
Sequential Marking	At Every Meter
Temperature Rating	-20 to +60 deg. C
Outer Jacket	PE (Suitable for Burial )
Thickness of Outer Jacket	0.85 mm (Nom.)
Colour of Jacket	Black
Approximate OD(approx)	9.70 mm
Filler	HDPE

**LOW FREQUENCY ELECTRICAL PARAMETER**

- Conductor Resistance (DC): 93.5 OHMS/1000MTR@20 Degree C. MAX.
- Resistance Unbalance: 5%MAX
- Mutual Capacitance: 5.6 nF/100 mtrs Max.
- Capacitance Unbalance Pair/Ground: 330PF/100M MAX
- Propagation Delay Skew: 536 nS/100M
- Normal Velocity of Propagation: 69%
- Impedance: 100±15%OHMS
- Worst Case cable skew : 45ns/100m
- Generally confirming to EIA/TIA 568-C.2 and IEC/ISO 11801



## HIGH FREQUENCY ELECTRICAL PARAMETER

FREQ (MHz)	ATT (dB/ 100m) max.	NEXT (dB) min.	PS.NEXT (dB) min.	ACRF (dB @ 100 m) min.	PS.ACRF (dB @ 100 m) min	Return Loss (dB/100m)
1	2.1	65	62	63	60.3	19
4	4	63	60.5	51.2	48.2	19
8	5.7	58.2	55.6	45.2	42.2	19
10	6.3	56.6	54	43.3	40.3	19
16	8	53.2	50.6	39.2	36.2	18
20	9	51.6	49	37.2	34.2	17.5
25	10.1	50	47.3	35.3	32.3	17
31.25	11.4	48.4	45.7	33.4	30.4	16.5
62.5	16.5	43.4	40.6	27.3	24.3	14
100	21.3	39.9	37.1	23.3	20.3	12
200	31.5	34.8	31.9	17.2	14.2	9
250	35.9	33.1	30.2	15.3	12.3	8

### Ordering Information

NCB-C6UBLKR-305-A	Cat6 23AWG Twisted Pair Armored Cable – 305M
-------------------	--

**D-Link (India) Limited**

Kalpataru Square, 2nd Floor, Kondivita Lane, Andheri-East, Mumbai-400059

Specifications are subject to change without notice.

D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.

All other trademarks belong to their respective owners.

©2010 D-Link Corporation. All rights reserved. Release 01 (May 2010)