


Cat6 Keystone Jacks

D-Link Category 6 keystone jacks are RJ45 8P 8C 50u jacks suitable for 22-26 AWG stranded and solid wire, compatible with both 110 & Krone punch down tool. They are capable of re-termination. They are available in universal labels color coded for T568A and T568B wiring schemes and fit in high density keystone patch panel. It supports IEC 60603-7-4 and complied with ANSI/TIA/EIA-568-C.2 standard.

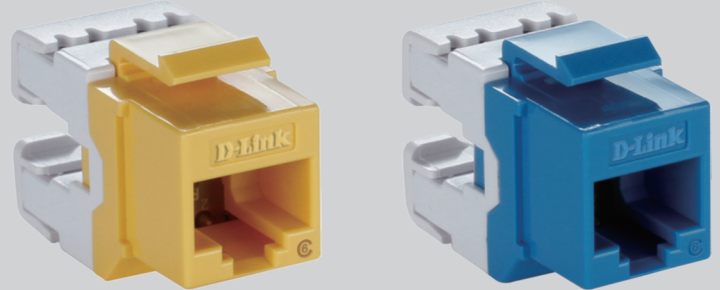

SPECIFICATIONS

- RJ45 Jack: **Housing: ABS+PC, UL 94V-0, with optional color**
- Contact Bracket: **PC, UL 94V-2, transparent color**
- PCB Material: **FR-4 T=1.2mm**
- RJ45 Jack Contact: **Material-phosphor bronze with nickel plated**
Finish: 50 micro-inch gold plated on plug contact area
- IDC: **Housing- PC + glass fiber, UL 94V-2**
Terminal: Phosphor bronze with tin plated
- IDC CAP: **ABS, UL 94V-0**
- Insertion Cycles: **750 times**
- IDC Life: **200 times Min.**
- Wire: **AWG 22-24**
- Operating Temperature: **-10°C to 60°C**
- Storage Temperature: **-10°C to 80°C**
- Current Rating: **1.5A**
- Insulation Resistance: **> 100 Megaohms**

- Contact Resistance
- Variations: **20 Milliohms**
- Insertion Force: **20N (Max)**

ORDERING INFORMATION

CAT6 UTP Keystone Jacks		
Part Code	Description	Color Code
NKJ-C6WHI1B21	Cat6 UTP Keystone Jack	White
NKJ-C6BLU1B21	Cat6 UTP Keystone Jack	Blue
NKJ-C6RED1B21	Cat6 UTP Keystone Jack	Red
NKJ-C6GRN1B21	Cat6 UTP Keystone Jack	Green
NKJ-C6YEL1B21	Cat6 UTP Keystone Jack	Yellow
NKJ-C6ORN1B21	Cat6 UTP Keystone Jack	Orange



D-Link (India) Limited
Kalpataru Square, 2nd Floor, Kondivita Lane, Andheri-East, Mumbai-400059
Specifications are subject to change without notice.
D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.
All other trademarks belong to their respective owners.
©2010 D-Link Corporation. All rights reserved. Release 01 (May 2010)